

Cloud



T700

Titan Fanless PCT Pos Terminal




T700

- Aluminum die-casting housing with cooling system, splash proof and dust prevent
- Sleek base with an innovative magnetic cable cover and a LED Logo light-
- Modular-design: 2nd Display, MSR, Dallas Lock, VFD, RFID, Barcode/2D Scanner, WiFi
- Cash drawer port as standard configuration
- VGA setting by bios
- Multi-layer painting for scratch prove



Dimensions

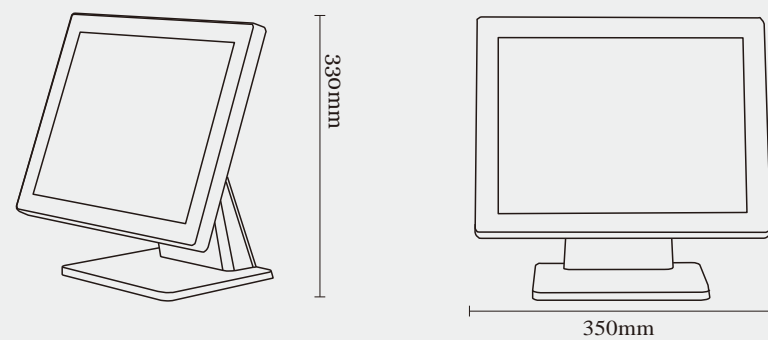

T700 POS TERMINAL

Model Number	T700	T700-3	T700-5
CPU Support	Intel Celeron Processor J6412 (1.5M Cache, up to 2.60 GHz)	Intel Core i3-6100U (2.3GHz 3MB Cache)	Intel Core i5-6360U (2.0GHz 4MB Cache)
System Memory	DDR4, SO-DIMM x 1, 4GB (Max. 16GB)		
Storage	HDD	500GB 2.5"x 1	
	SSD	SSD x 1 (Optional)	
LCD	Size	15" TFT LCD Panel	
	Brightness	300cd/m2 (Typ.)	
	Resolution	1024 x 768	
Touch Screen	True-Flat Projected Capacitive Touch		
Tilt Angle	0 ~ 120 degree		
External I/O Port	Rear	4 x USB 3.0 +2 x USB 2.0 Ports	
		3 x Serial port (RJ50); (COM1~3: 0/5/12V by pin-JP)	
		1 x VGA (Power enable by BIOS; +12V)	
		1 x Cash Drawer Port (RJ11; +12V)	
		1 x LAN (10/100/1000)	
		1 x Mic-In/Speaker-out (Combo Jack)	
		1 x DC In	
		1 x Power Switch	
Speaker	2 x 2W speaker (Optional)		
Power	External power adapter, 60W/12V (Lock type)		
EMC Safety	CE, FCC		
Environment	Operating Temperature	0°C ~ 35°C	
	Storage Temperature	-15°C ~ 60°C	
	Operating Humidity	20% - 85% RH non condensing	
	Storage Humidity	20% - 85% RH non condensing	
OS Support	Windows11/10 LTSC, Ubuntu 18.0.4	Windows10	
Dimension (W x D x H)	445*310*415		
Weight (N.W./G.W.)	4.6KGS/6.3KGS		
Wall Mount	VESA 100 x 100mm		
	MSR (USB)	MSR + iButton (Combo)	
	Scanner	2D	
	Customer display (USB)	Flush mount VFD display, 2x20 characters	
	2nd Display	VGA, 9.7"(1024*768)/12.1" (1280*800)	



MSR & COMBO

T3 Single screen



VFD 2x20 characters

9.7" 2nd display

