



GL A3



- Power Requirements** : 110/220V. 60/50Hz. AC (%±10) 24V. DC at standby ~2W. max. ~65W.
- Body Features** : Single piece 304-Grade (Opt. 316-Grade) satin finished stainless steel body. Natural granite or polished mahogany top lid is standard. Polished mahogany covering is included on separator railings with mahogany top lid version. Stainless steel separator railings with granite top lid version.
- Wing Features** : Three impact resistant 10 mm. thick tempered glass wings. (Opt. Lexan or Plexiglas).
- Operating Temperature, Humidity, IP Rating, MCBF** : -20°C to +68°C (Opt. -50°C with heater unit), RH 95% non-condensing / IP 44 Indoor Model / 1M Cycles
- Control System** : All inputs are opto-coupler protected. Compatible with all access control systems that provide dry contact or grounding outputs. Optional RS232/RS485/TCP IP control module is available.
- Operation** : Electronically controlled DC motor driven bi-directional system.
- Emergency Mode** : System allows free passage in emergency mode and in case of power failure.
- Flow Rate** : Capacity of Mechanism: ~40 passages/minute; Nominal: ~10 - 25 passages-per-minute (Recommended reference figure). *Utilisation of different access control units can change the flow rate.
- Standard Features** : Circular RGB LED direction and status indicator.
- Optional Accessories and Applications** : Remote control unit, interface unit for PC, RS485, RS232 and LAN, counter, audio-messaging system, floor mounting plate, separator, card reader pole.

WOODEN

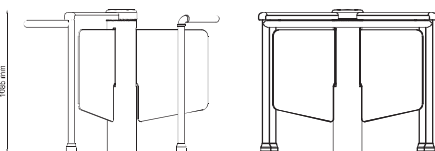

GRANITE

