


PADDLE GATE



- Power Requirements** : 110/220V. 60/50Hz. AC (%±10) 24V. DC
 At standby ~10W. During operation ~ 42W. (Single-sided)
 At standby ~20W. During operation ~ 84W. (Central unit)
- Wing Features** : 12mm thick impact resistant tempered glass wings (Optional lexan or plexiglas)
- Body Features** : 1,5mm 304-Grade (Opt. 316-Grade) satin finished stainless steel. Adequate space is available inside front part of the body for installation of various reader devices and wiring.
- Operating Temperature, Humidity, IP Rating, MCBF** : -20°C to +68°C (RH 95% non-condensing) / IP 44 Indoor Model / 1M Cycles
- Control System** : All inputs are opto-coupler protected. Compatible with all access control systems that provide dry contact or grounding outputs. Optional RS232/RS485/TCP IP control module is available.
- System Features & Operation** : Electronically controlled rapid wing movement for quick and smooth bi-directional passages.
 Internal dip switch selectable free passage by photocell detection, restricted access, controlled access on both or single direction modes are built in features.
- Emergency Mode** : System allows free passage in emergency mode and in case of power failure.
- Flow Rate** : Capacity of Mechanism: ~1-120 passages/minute; Nominal: ~25-50 passage-per-minute (Recommended reference figure).
 Utilisation of different access control units can change the flow rate.
- Standard Features** : Dot matrix direction and status indicators for both directions.
- Optional Accessories and Applications** : Remote control unit, interface unit for PC, RS485, RS232 and LAN, counter, audio-messaging system, floor mounting plate, coin slot/intelligent coin system and coin box, separator, card reader pole, jump over prevention barrier.

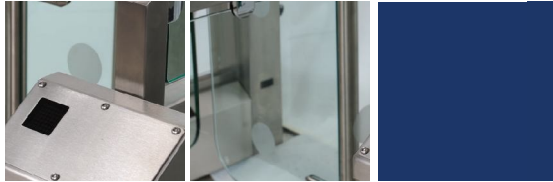