


HIDDEN GATE



- Power Requirements** : 110/220V. 60/50Hz. AC (%±10) 24V.DC
 At standby ~10W. During operation ~39W. (Single-sided)
 At standby ~20W. During operation ~78W. (Central unit)
- Wing Features** : RGB LED illuminated, 10 mm. thick tempered glass (impact resistant).
- Body Features** : The body is made of 304-Grade (Opt. 316-Grade) satin finished stainless steel. Natural granite (Star Galaxy Black Pattern) stone on top is standard feature for a decorative and aesthetic appearance. (Opt. Materials and patterns available)
- Operating Temperature, Humidity, IP Rating, MCBF** : -20°C to + 68°C / RH 95% non-condensing / IP 44 Indoor Model / 1M Cycles
- System Features & Operation** : Electronically controlled rapid wing movement for quick and smooth bi-directional passages. Internal dip switch selectable free passage by photocell detection, restricted access, controlled access on both or single direction modes are built in features.
- Emergency Mode** : System allows free passage in emergency mode and in case of power failure (powered by internal back-up battery).
- Flow Rate** : Capacity of Mechanism: ~1-120 passages/minute; Nominal: ~25-50 passage-per-minute (Recommended reference figure).
 *Utilisation of different access control units can change the flow rate.
- Standard Features** : Dot matrix direction and status indicators, natural granite top lid, stainless steel and acrylic reader cover plates for both directions.
- Optional Accessories and Applications** : Tempered glass side (lateral) panels, Remote control unit, interface unit for PC, RS485, RS232 and LAN, counter, audio-messaging system, alarm sensor, floor mounting plate, coin slot/intelligent coin system and coin box, separator, card reader pole.

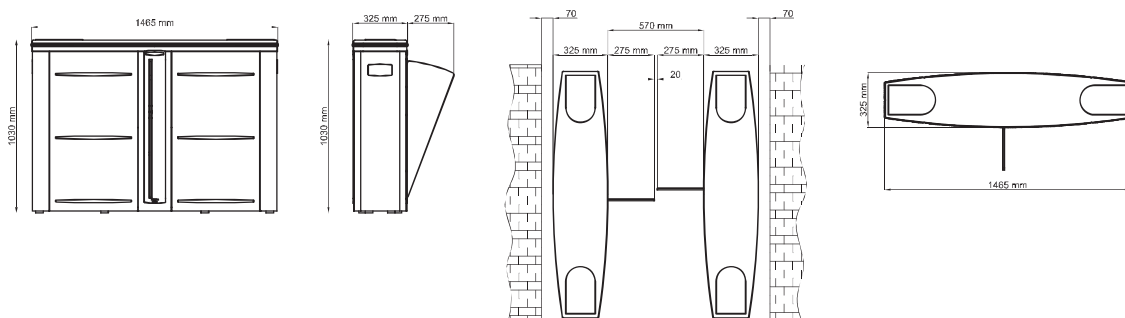

**Design and specifications are subject to change without notice.*