

ZK Facial & Fingerprint T&A and Access Control Identification Terminal

Introduction:

iFace series of multi-biometric identification time attendance products adopts ZKSoftware latest ZEM600 platform with ZK Face 5.0 and ZK Finger 10.0 algorithm and large capacity memory. iFace series integrated 630MHz high speed ZK Multi-Bio processor and high definition infrared camera which enables user identification in the dark environment. The appearances of iFace series are designed by Germany professional design company according to the view of human engineering. All operations of iFace device are designed to be finished on the 4.3 inches TFT touch screen. Multi-model communications includes RS232/485, TCP/IP, optional WiFi or GPRS. Optional built-in 2000 mAh battery eliminates the trouble of power-cut.



4.3" TFT Touch Screen



High Resolution Infrared Camera



ZK Optical Fingerprint Sensor



High Speed ZK Multi-Bio CPU



ZEM600 Multi-Media Development Platform



Touchable Function Keypad



iFace 302

Features:

- * Integration of Fingerprint, Facial, RFID, and Password identification methods.
- * Elegant design according to the view of human engineering
- * 4.3" TFT touch screen, easy operation, fashionable and simple interface.
- * 6 user-defined function keys
- * Extendable scheduled doorbell.
- * Simple access control function.
- * Webserver management software via IE browser.
- * Infrared optical system enables user identification in dark environment.
- * Optional built-in backup battery support extra 4 hours continuous operation if power cut.
- * Optional built-in wireless WiFi or GPRS communication makes easier device installation without wiring.

Specification:

Processor: Multi-Bio 600

Memory: 256M flash, 64 SDRAM

Camera: High Definition Infrared Camera

Display: 4.3" TFT with touch screen

Storage Capacity: Face:700

Fingerprint:5000

Logs:100,000

Back-up Battery:2000 mAh

Communication: TCP/IP, RS232/485

USB-HOST: Two

T&A functions: Extendable Scheduled-bell, DLST, Self-Inquiry, Work Code, Short Message, T9 input, Webserver

A&C function: electric lock, door sensor, exit button, Wiegand output,

Optional functions: WiFi ,GPRS, serial printer, Mifare/HID/iClass, backup battery


Power Supply: 12V 3A

Verification Speed: ≤2 sec

Operating Temperature: 0 °C- 45 °C

Operating Humidity: 20%-80%

Dimension: 193.6*165.2*86 mm

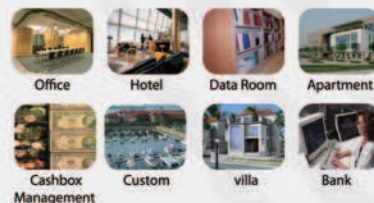

ZKSoftware Inc.

ZK Mansion,Wuhe Rd,Gangtou,Bantian,Buji Town,Longgang District,Shenzhen China 518129
Tel:86-755-8960 2345/46/47/48 Fax:86-755-8960 2675 www.zksoftware.com

